


# PLATEA PANEL

DMX 512 flicker free

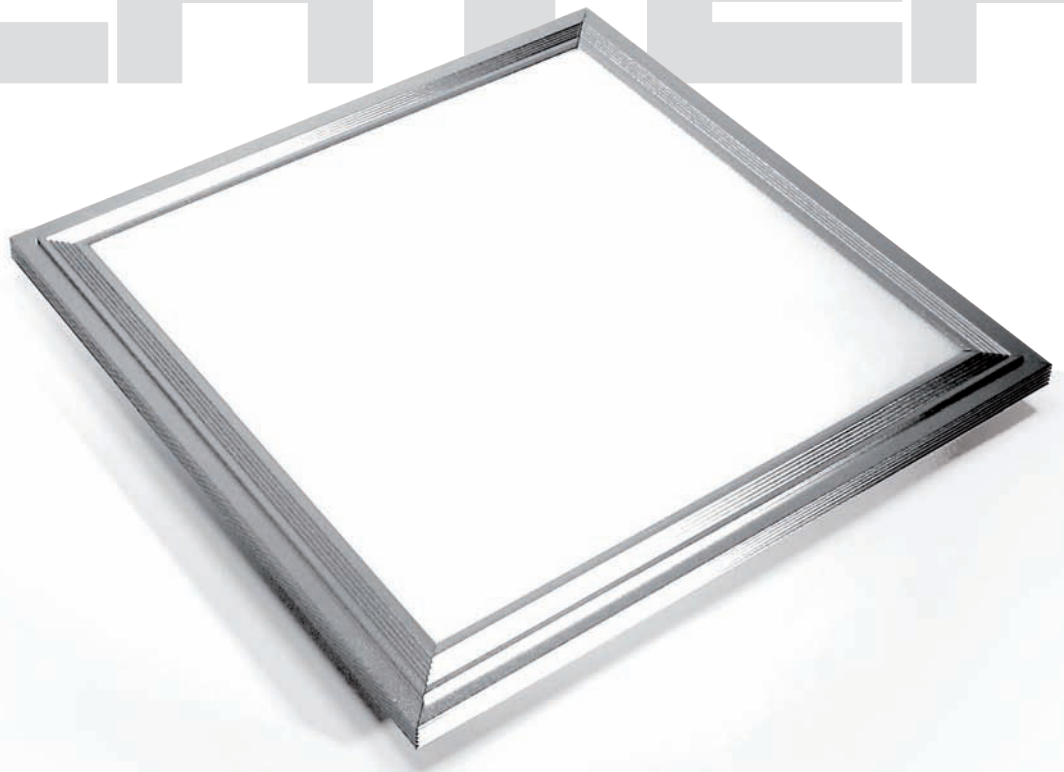

## MAIN VERSIONS

**60X60**  
**30X30**

## KEY FEATURES

- Led even field panel
- Dmx 512 intensity control
- Energy efficient
- Long lasting LED source, and maintenance savings
- Available color temperature: 3000/4000/4500/5600 °K
- Throw distance: 3-9 m
- Flicker free
- RDM
- Light intensity more than double compared to majority of existing products

## LIGHT SOURCE:

- Power engine: 20W or 40W mini LED
- Average led life: 50.000 Hours

## SPECIFICATIONS:

### Color temperature

- Available color temperature: 3000/4000/4500/5600 °K

### Beam angle

- 120°

### Dimmer

- Linear digital 0-100%

### Flicker free

- PWM frequency control from 600 to 4000 Hz, to avoid flicker in any type of filming, including camera phones

### Light output

- 4200 Lumen

## PHYSICAL SIZE:

- Attached drawings
- Weight: 1,1 kg / 4,2 kg
- Extruded aluminum, polycarbonate and prismatic lenses

## CONTROL PROTOCOL AND PROGRAMMING:

- USITT Dmx 512/1990
- Control channel modes: 2 or 3 channels
- 3 operational modes/use: potentiometer, DMX-512, master/slave
- RDM
- Remote display facility
- Dmx digital communication to upload software via standard dmx cable

## AVAILABLE COLORS:

- White
- Silver
- Other on request

## ELECTRICAL SPECIFICATION/ CONNECTIONS:

- AC power: 100-240V, 50/60HZ
- Max power consumption: 40 W

## AVAILABLE ON REQUEST:

- Special sizes

## ACCESSORIES:

- Steel cables for suspension
- Remote data information device
- Accessories can be included in special offer

